


CODED MAGNET SWITCHES - ANATOM



SPECIFICATIONS	KEY FEATURES	
<p>C UL_{us}, CE, EN60947-5-1/2/3</p> <p>24V AC / DC, -15% +10%, 30ma, input</p> <p>1-10mm "ON" switching distance</p> <p>12mm opening switching "OFF" distance</p> <p>-13°F, +158°F</p> <p>NEMA 4X, IP67</p>	<ul style="list-style-type: none"> • Large misalignment gap: 12mm in-out, 7mm left-right • LED indicates "ON" actuation • Polycarbonate Housings Stainless Steel Option (page__) • Submersible • Quick Connect Option 	<div style="border: 1px solid black; padding: 5px; width: fit-content; margin: 0 auto;">Solid state design</div>  <p>ANATOM 6S Series \$84 List Price</p>

Switch + Magnet Part#	Closed Safety Contacts*	Aux. N.O. Contacts*	List
ANATOM 6S	2	-	\$84
ANATOM 78S	2	1	\$88

*Contacts listed with power "ON" and door "CLOSED".

Product	Safety Category Capability
One ANATOM 78S with AWAX safety module	Level 4
Multiple (30 max.) ANATOM 78S switches in series with AWAX safety module	Level 3

Standard cable length 9.75 ft.
For 19.5 ft. cable, add "-6M"
to part# & add \$12.


Example: ANATOM 6S-6M \$84 + \$12 = \$96

Standard cable length 9.75 ft.
For 19.5 ft. cable, add "-6M"
to part# & add \$12.

Example: ANATOM 6S-6M \$84 + \$12 = \$96

Electrical Diagrams


All wiring diagrams with power "OFF" and door "OPEN" or "CLOSED".

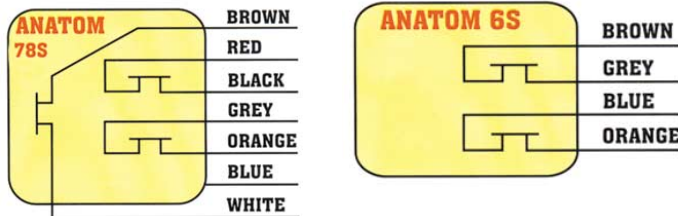

Dimensions

Switch & Module


Coded Magnet

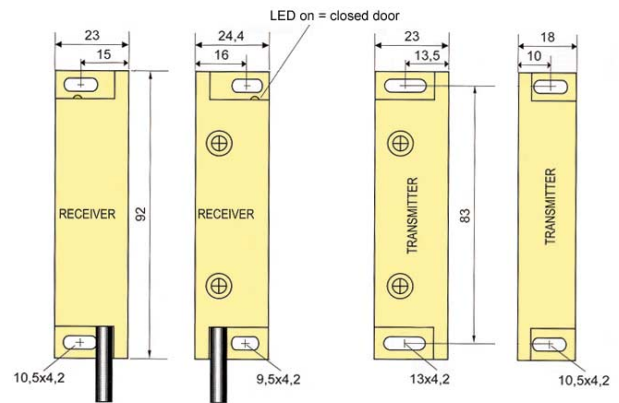

Views: Top Side Top Side

Above dimensions for polycarbonate housing.
Dimensions for stainless steel version on pg. 40

With Quick Connect Plug Option

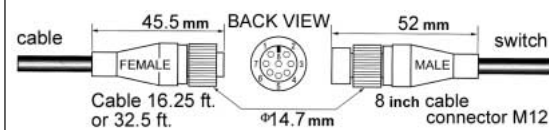

Part #	List
MALE	
ANATOM 78S-MKT	\$162
FEMALE	
FKT-5M (16.25 ft.)	\$98
FKT-10M (32.5 ft.)	\$132



ONLY functions with AWAX module.

For application examples, see page 65.