

SPECIFICATIONS	KEY FEATURES	
<p>C UL_{us}, CE, EN60947-5-1/2/3</p> <p>24V AC / DC, -15% +10%, 30ma, input</p> <p>1-10mm "ON" switching distance</p> <p>12mm opening switching "OFF" distance</p> <p>-13°F, +158°F</p> <p>NEMA 4X, IP67</p>	<ul style="list-style-type: none"> • Large misalignment gap: 12mm in-out, 7mm left-right • LED indicates "ON" actuation • Polycarbonate Housings Stainless Steel Option (page__) • Submersible • Quick Connect Option 	<div style="border: 1px solid black; padding: 5px; display: inline-block;">Solid state design</div> <p>ANATOM 6S Series</p>

Switch + Magnet Part#	Closed Safety Contacts*	Aux. N.O. Contacts*	List
ANATOM 6S	2	-	
ANATOM 78S	2	1	

*Contacts listed with power "ON" and door "CLOSED".

Product	Safety Category Capability
One ANATOM 78S with AWAX safety module	Level 4
Multiple (30 max.) ANATOM 78S switches in series with AWAX safety module	Level 3

Standard cable length 9.75 ft.


Standard cable length 9.75 ft.

Standard cable length 9.75 ft.

Dimensions

Switch & Module

Coded Magnet

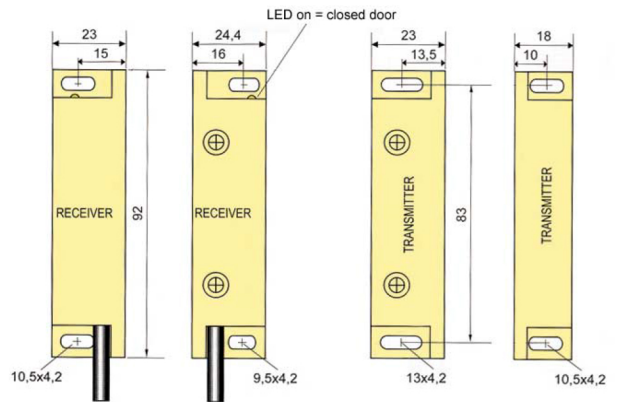

Views: Top Side Top Side

Above dimensions for polycarbonate housing.


Dimensions for stainless steel version on pg. 40

Electrical Diagrams

All wiring diagrams with power "OFF" and door "OPEN" or "CLOSED".



With Quick Connect Plug Option

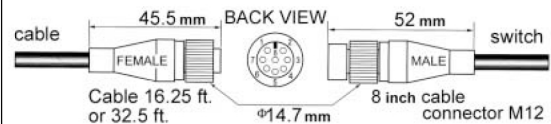

Part #	List
MALE	
ANATOM 78S-MKT	
FEMALE	
FKT-5M (16.25 ft.)	
FKT-10M (32.5 ft.)	